


Step 5. Install Cradles

Install cradles to the storage frame vertical posts, and adjust the heights, and then secure the clamps.

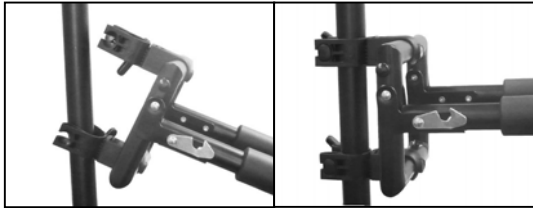


SPAREHAND® SYSTEMS
CADENCE™ KAYAK STORAGE RACK

**Model: KC-420 Malibu &
KC-422 Malibu Plus**


Caution – Failure to follow these guidelines can result in property damage or personal injury.

Level Adjustment, Weight & Length Limit:

Level Adjustment

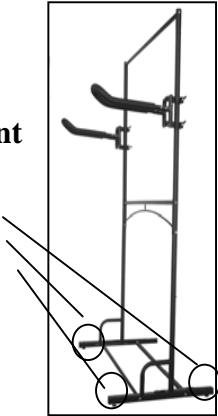

Weight Limit

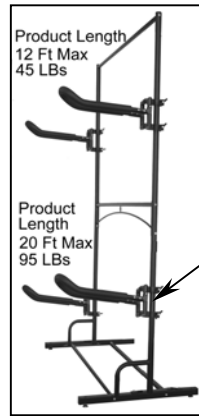

Optional K-1 Cradle Sold Separately.

Please note:
KC-420 Malibu model: 1 pair of K-1 cradle included.
KC-422 Malibu PLUS model: 2 pairs of K-1 cradle included.


To expand your Malibu / Malibu rack into 4 kayak storage system, please purchase additional K-1 cradle. Cradle can be installed on BOTH side of Malibu & Malibu PLUS models only.



- Parts are not labeled. Before assembly, please identify each parts according to the descriptions and diagrams below.
- Do not use if the product **or any parts** is defective.
- Do not tilt or lift the storage rack.
- Do not drop kayak or any object on the rack. Place objects carefully and slowly.
- Do not step, stand, or climb on the storage unit.
- Do not use if loads are not balanced and / or cannot be used on level and secure ground. Always make sure the rack will not tip over. Secure the rack to the wall or floor if necessary.
- Kayak must be placed sideways (horizontally) on K-1 cradles. Faces outward and with the upper side lean against vertical posts. Do not place kayak flat on the cradles.
- Always make sure heavier loads are at the bottom and never place your kayak on upper rack position with the bottom rack empty. **Top-heavy loads are dangerous.**
- Use only if you determine the rack can be used safely.
- The manufacture and its agents are not responsible for any damages or injuries caused by the use or misuse of the product.
- This rack is intended for indoor use only.
- Please follow the instructions and observe weight and size limits. Upper level: 45 Lbs and 12 feet length maximum load. Lower level: 90 Lbs and 20 feet product length maximum load. Load and size limits are per pair of cradles.
- When moving the storage rack, remove all objects from the rack.
- For technical support or questions regarding this product, please contact 626-338-8998. PST 9:00 AM to 3:00 PM.

Parts


- A. BASE SQUARE TUBE (2 PCS)
- B. BASE ROUND TUBE (2 PCS)

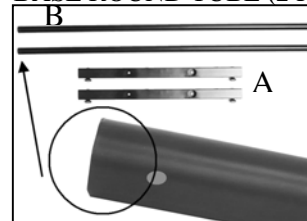


SPAREHAND® Systems, division of Stoneman Sports
Tel: 626-338-8998

www.stonemansports.com info@StonemanSports.com

C. LOWER VERTICAL POST (2 PCS)

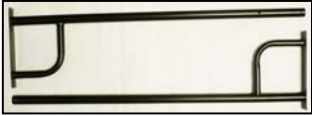


D. UPPER VERTICAL POST (2 PCS)

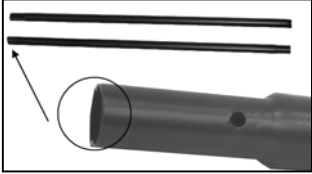

E. HORIZONTAL ARCHED BEAM (1 PC)



F. TOP HORIZONTAL BEAM (1 PC)

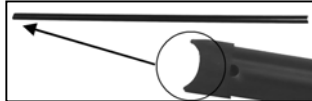

G. KAYAK CRADLE & CLAMPS: 2 pcs. [Malibu Plus has 4 pcs]



Hardware:



I. Long Screws (4 PCS)



J. Medium Screws (2 PCS)



K. Short Screw (10 PCS)




L. Nuts (2 PCS)

TOOLS:




M: Wrench (1 PC);



L: Allen Wrench (1 PC)

Step 2. Assemble the Vertical Posts.


Install the lower Vertical Posts (Part C) on top of the base with short screws (Part K).

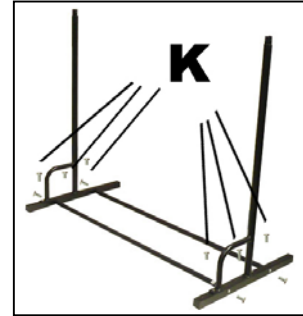

Step 3. Upper vertical Posts and Horizontal Arched Beam

Place the 2 upper Vertical Post (Part D) onto the lower Vertical Post (Part C); connect the Horizontal Arched Beam (Part E.) with 4 long screws (Part I)


Notes: 2 of the long screws will penetrate the vertical poles, extension vertical poles and the horizontal arched beam, and then secured with the 2 nuts (Part L).

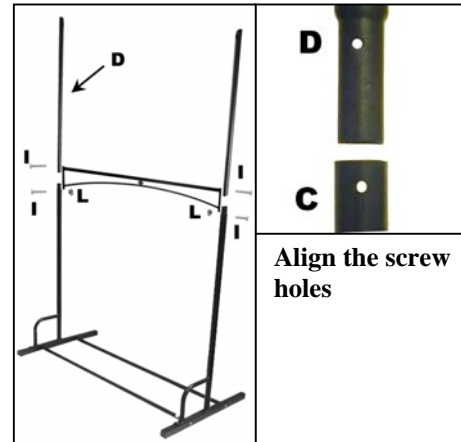

Align the screw holes

Step 4. Top Horizontal Beam

Connect the Top Horizontal Beam (Part F) and the 2 pieces of upper Vertical Posts (Part D) with 2 Medium sized Screws (Part J.)

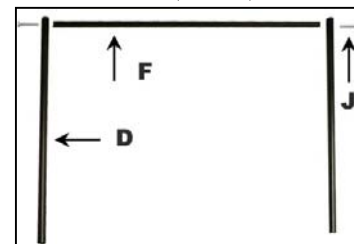

Installation Instructions:

Step 1. Base Assembly

Assemble the Part A & B with Short Screws (Part K)

